


# MUSHROOM HEAD BOLT — DIN 603

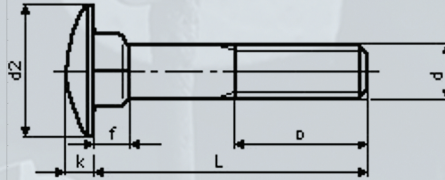

Thread Size d1	Thread Pitch	Thread Length b1			Head Dia. d2		Head Height k		Square Depth f		Square AF v	
		For Lengths <=125mm	For Lengths >125mm<=200mm	For Lengths >200 mm	min.	max.	min.	max.	min.	max.	min.	max.
M5	0.8	16	22		12.45	13.55	2.70	3.30	2.90	4.10	4.52	5.48
M6	1	18	24		15.45	16.55	3.12	3.88	3.40	4.60	5.52	6.48
M8	1.25	22	28	41	19.35	20.65	4.12	4.88	4.40	5.60	7.42	8.58
M10	1.5	26	32	45	23.35	24.65	4.62	5.38	5.40	6.60	9.42	10.58
M12	1.75	30	36	49	29.35	30.65	6.05	6.95	7.25	8.75	11.3	12.7
M16	2	38	44	57	37.20	38.80	8.05	8.95	11.1	12.9	15.3	16.7
M20	2.5	46	52	65	45.20	46.80	9.95	11.05	14.10	15.90	19.16	20.84

\* All dimensions are in mm.

\*All the data are from informative purpose only

Length Tolerance	DIN 603															
	16	20	25	30	35	40	45	50	(55)	60	(65)	70	(75)	80	90	100
Nominal Length																
min.	15.1	18.95	23.95	28.95	33.75	38.75	43.75	48.75	53.5	58.5	63.5	68.5	73.5	78.5	88.25	98.25
max.	16.9	21.05	26.05	31.05	36.25	41.25	46.25	51.25	56.5	61.5	66.5	71.5	76.5	81.5	91.75	101.8

Property Class	Stainless Steel
	A2 & A4
Finish	Plain
Thread Tolerance	8g

