


BS 1936 SERIES ALLEN CAP

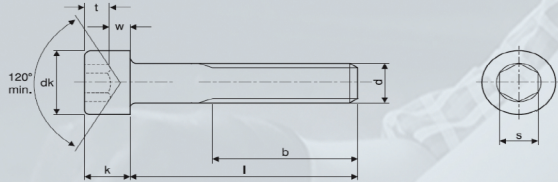

Nominal size and thread diameter d	Pitch of thread		Head diameter dk		Thickness of head k		Width across flats	Hex socket depth t	Wall thickness s
	UNC	UNF	max.	min.	max.	min.	nom.	min.	min.
1/4	20	28	3/8	0.367	1/4	0.233	3/16	0.120	0.080
5/16	18	24	7/16	0.429	5/16	0.306	7/32	0.151	0.100
3/8	16	24	9/16	0.553	3/8	0.368	5/16	0.182	0.120
7/16	14	20	5/8	0.615	7/16	0.430	5/16	0.213	0.140
1/2	13	20	3/4	0.739	1/2	0.492	3/8	0.245	0.160
9/16	12	18	0.812	0.795	0.562	0.553	3/8	0.276	0.180
5/8	11	18	7/8	0.863	5/8	0.616	1/2	0.307	0.200
3/4	10	16	1.000	0.987	3/4	0.740	9/16	0.370	0.240
7/8	9	14	1.1/8	1.111	7/8	0.864	9/16	0.432	0.280
1	8	14/12	1.5/16	1.297	1.000	0.988	5/8	0.495	0.320

*All dimensions are in inches.

*All data are for informative purpose only

