


# CONE POINT GRUB \_DIN 914

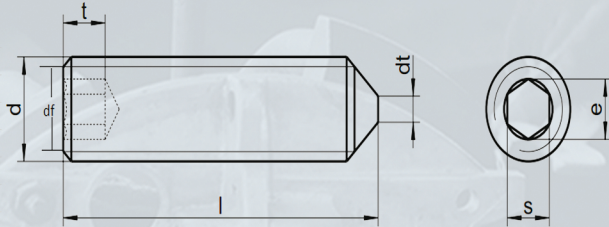

d		M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20
P		0.50	0.70	0.80	1.00	1.25	1.50	1.75	2.00	2.00	2.50	2.50
d	max	2.98	3.97	4.97	5.97	7.97	9.96	11.96	13.96	15.96	17.95	19.95
	min	2.87	3.83	4.82	5.79	7.76	9.73	11.70	13.68	15.68	17.62	19.62
df	max	2.36	3.11	3.99	4.74	6.43	8.12	9.81	11.50	13.50	14.89	16.89
	min	2.25	2.97	3.84	4.56	6.23	7.88	9.54	11.20	13.20	14.54	16.54
dt	max	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	4.00	5.00	5.00
	min	1.58	2.08	2.58	3.08	4.10	5.10	6.14	6.14	8.12	10.12	10.12
S	max	1.52	2.02	2.52	3.02	4.02	5.02	6.02	6.02	8.03	10.03	10.03
	min	1.52	2.02	2.52	3.02	4.02	5.02	6.02	6.02	8.03	10.03	10.03
e		1.73	2.30	2.87	3.44	4.58	5.72	6.86	6.86	9.14	11.42	11.42
t		2.00	2.50	3.00	3.50	5.00	6.00	8.00	9.00	10.00	11.00	12.00

\* All dimensions are in mm

\*All the data are for informative purpose only.

