


PLAIN WASHERS_DIN125A

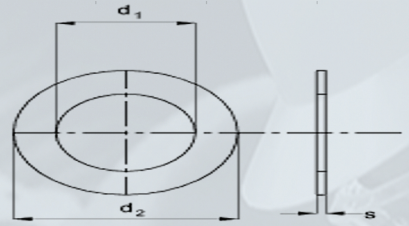

Screw Size	Hole Diameter d1		Outside Diameter d2		Thickness s		
	min.= nominal	max.	min.	max.= nominal	nominal	min.	max.
1.6	1.7	1.84	3.7	4	0.3	0.25	0.35
1.7	1.8	1.94	4.2	4.5	0.3	0.25	0.35
2	2.2	2.34	4.7	5	0.3	0.25	0.35
2.3	2.5	2.64	5.7	6	0.5	0.45	0.55
2.5	2.7	2.84	5.7	6	0.5	0.45	0.55
2.6	2.8	2.94	6.64	7	0.5	0.45	0.55
3	3.2	3.38	6.64	7	0.5	0.45	0.55
3.5	3.7	3.88	7.64	8	0.5	0.45	0.55
4	4.3	4.48	8.64	9	0.8	0.7	0.9
5	5.3	5.48	9.64	10	1	0.9	1.1
6	6.4	6.62	11.57	12	1.6	1.4	1.8
7	7.4	7.62	13.57	14	1.6	1.4	1.8
8	8.4	8.62	15.57	16	1.6	1.4	1.8
10	10.5	10.77	19.48	20	2	1.8	2.2
12	13	13.27	23.48	24	2.5	2.3	2.7
14	15	15.27	27.48	28	2.5	2.3	2.7
16	17	17.27	29.48	30	3	2.7	3.3
18	19	19.33	33.38	34	3	2.7	3.3
20	21	21.33	36.38	37	3	2.7	3.3
22	23	23.33	38.38	39	3	2.7	3.3
24	25	25.33	43.38	44	4	3.7	4.3
27	28	28.33	49.38	50	4	3.7	4.3
30	31	31.39	55.26	56	4	3.7	4.3
33	34	34.62	58.8	60	5	4.4	5.6
36	37	37.62	64.8	66	5	4.4	5.6
39	40	40.62	70.8	72	6	5.4	6.6
42	43	43.62	76.8	78	7	6	8
45	46	46.62	83.6	85	7	6	8
48	50	50.62	90.6	92	8	7	9
52	54	54.74	96.6	98	8	7	9
56	58	58.74	103.6	105	9	8	10

*All dimensions are in mm.

*All data are for informative purpose only.

